


TECHNI CONNECT 02

Temperature Operating Range: - 20 / + 70 C°

Hose Features:

- Good resistance to mechanical damage
- Robust
- Highly flexible, compressibility 1:8
- External galvanised steel helix protects against abrasion
- Stronger than Techni Connect 01

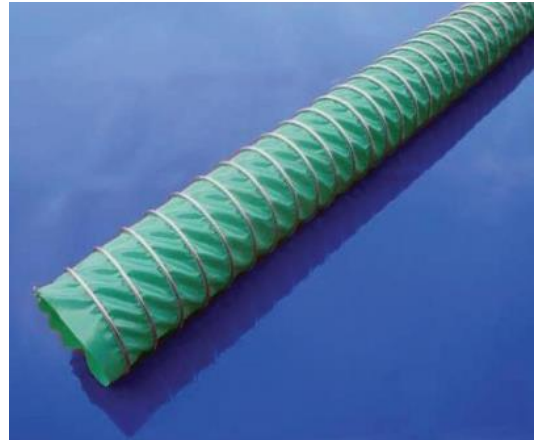

Suitable for use in:

- Air conditioning
- Suction plants
- Tent ventilation / Heating
- Low pressure applications
- Ship ventilation
- Printing industries
- Ventilation
- Ducting and extraction of air
- Weld fume extraction
- Vehicle ventilation
- Asphalt plant filters
- Tunnel-Mining ventilations

Length: 10 m

PRODUCT CODES: SIZES & TECHNICAL SPECIFICATIONS

PRODUCT CODE	INNER DIAMETER	WORKING PRESSURE	VACUUM	BENDING RADIUS	WEIGHT
	<i>mm</i>	<i>bar</i>	<i>bar</i>	<i>mm</i>	<i>gr. / mt.</i>
02-01-90	90	0,548	0,110	62	0,800
02-01-102	102	0,493	0,090	68	0,800
02-01-112	112	0,467	0,076	74	0,900
02-01-127	127	0,319	0,060	83	1,000
02-01-133	133	0,266	0,057	86	1,000
02-01-140	140	0,238	0,051	92	1,000
02-01-152	152	0,205	0,046	98	1,100
02-01-160	160	0,192	0,04	104	1,100
02-01-180	180	0,154	0,034	116	1,200
02-01-203	203	0,133	0,030	128	1,400
02-01-229	229	0,107	0,026	143	1,600
02-01-254	254	0,088	0,023	183	1,800
02-01-280	280	0,069	0,020	201	2,100
02-01-305	305	0,056	0,019	218	2,300
02-01-315	315	0,052	0,009	229	2,300
02-01-356	356	0,043	0,006	253	2,700
02-01-406	406	0,034	0,005	287	3,300
02-01-457	457	0,031	0,004	369	3,800
02-01-508	508	0,029	0,003	408	4,300
02-01-559	559	0,026	0,002	446	4,800
02-01-610	610	0,025	0,002	489	5,300
02-01-710	710	0,018	0,001	567	6,200
02-01-820	820	0,010	0,001	646	7,100
02-01-920	920	0,006	0,001	728	8,000
02-01-1030	1030	0,004	0,001	810	8,900
02-01-1130	1130	0,002	0,001	893	9,300
02-01-1240	1240	0,001	0,001	974	9,800