


TECHNI CONNECT 27

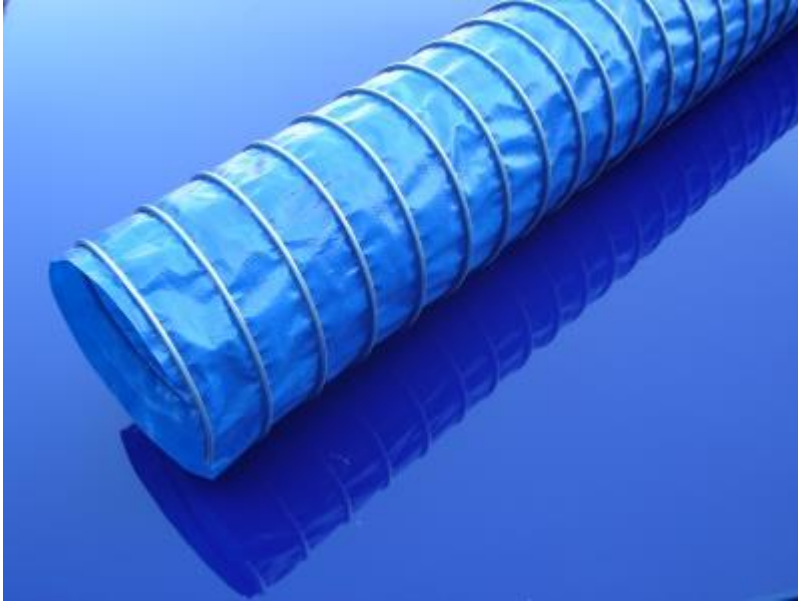

Operating Temperature Range:

- 10 / + 60 C°

Features:

- Cost- Effective hose
- Robust
- Extremely lightweight
- Highly flexible, compressibility to 1:9 ratio
- External galvanised steel helix protects against abrasion

For use in:

- Air conditioning
- Ventilation
- Mining ventilation
- Ducting and extraction of air
- Low pressure applications
- Vehicle ventilation
- Tunnel ventilation

Lengths (on application):

127 mm – 820 mm ID – 10-20 metres

920 mm – 1240 mm ID – 5-10 metres

PART CODES: SIZES & TECHNICAL SPECIFICATIONS

PRODUCT CODE	INNER DIAMETER	WORKING PRESSURE	VACUUM	BENDING RADIUS	WEIGHT
	<i>mm</i>	<i>bar</i>	<i>bar</i>	<i>mm</i>	<i>gr. / mt.</i>
27-01-127	127	0,385	0,120	50	0,70
27-01-133	133	0,285	0,100	56	0,80
27-01-140	140	0,245	0,090	62	0,80
27-01-152	152	0,215	0,078	68	0,80
27-01-160	160	0,185	0,068	74	0,80
27-01-180	180	0,155	0,060	83	0,90
27-01-203	203	0,135	0,058	86	0,90
27-01-229	229	0,25	0,055	92	1,00
27-01-254	254	0,120	0,054	98	1,00
27-01-270	270	0,115	0,049	104	1,10
27-01-305	305	0,090	0,041	116	1,20
27-01-315	315	0,085	0,035	128	1,30
27-01-356	356	0,065	0,030	166	1,50
27-01-406	406	0,060	0,026	183	1,60
27-01-457	457	0,055	0,023	201	1,90
27-01-508	508	0,045	0,021	218	2,10
27-01-559	559	0,040	0,020	229	2,20
27-01-610	610	0,035	0,018	253	2,50
27-01-710	710	0,015	0,016	287	3,10
27-01-820	820	0,013	0,015	369	3,70
27-01-920	920	0,010	0,014	408	4,10
27-01-1030	1030	0,009	0,013	446	4,60
27-01-1130	1130	0,007	0,013	489	5,10
27-01-1240	1240	0,005	0,013	498	5,60